


measurement

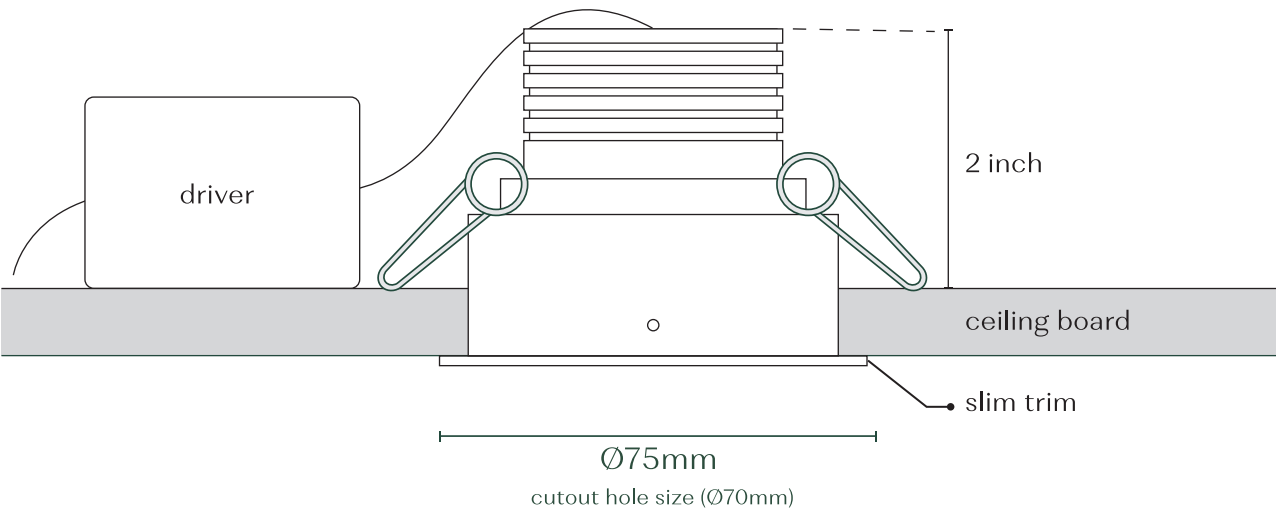

Specifications

Colour Temperature	3500K natural white
Beam Angle	41°
Driver	Phase dimmable driver included
Light Source	LED
Luminous Flux	TBC
Colour Rendering Index	>98 (Rf=95, Rg=98, R9=93)
LED System Power	10W
Mains Voltage	220-240, 50Hz
LED Life	>50,000 hours (L80, B10)
Warranty	3 years
Weight (1 set)	TBC
Materials	Aluminium, stainless steel, plastic & powder coating finish

installation method




Ceiling Thickness
1mm~20mm




Please make sure that mains is
disconnected before proceeding!

FOLLOW THE STEPS AS ILLUSTRATED BELOW

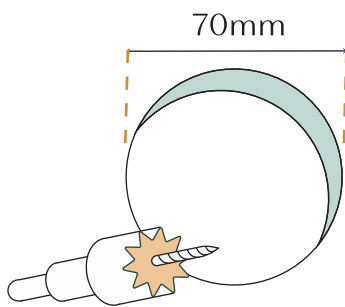

STEP 1

Make a cut out using hole saw cutter.

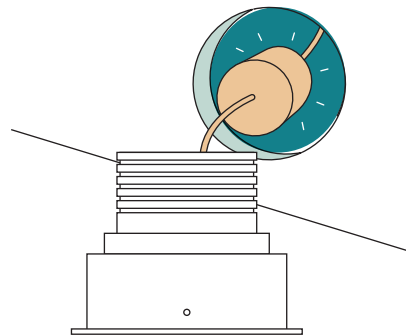

STEP 2


Connect module to the driver.



STEP 3


Compress spring plate and gently
insert through the ceiling cut hole.

adjustment

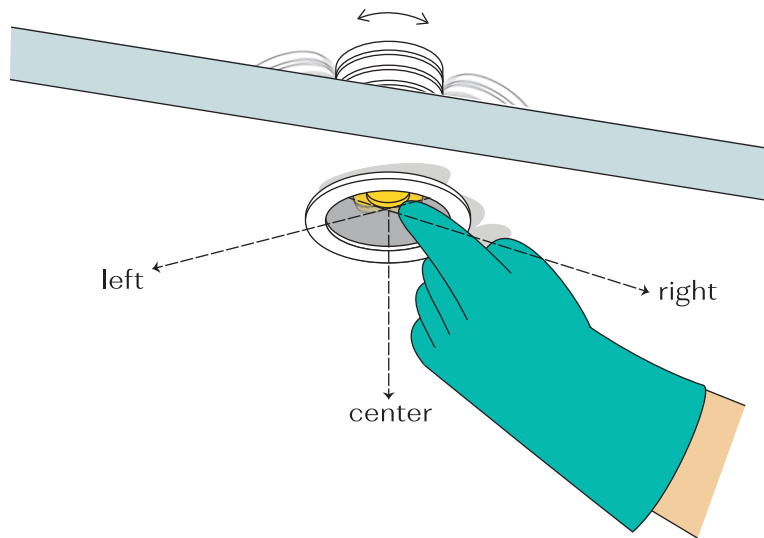

TILTING

Tilt the module to the desired angle. Installation is complete.

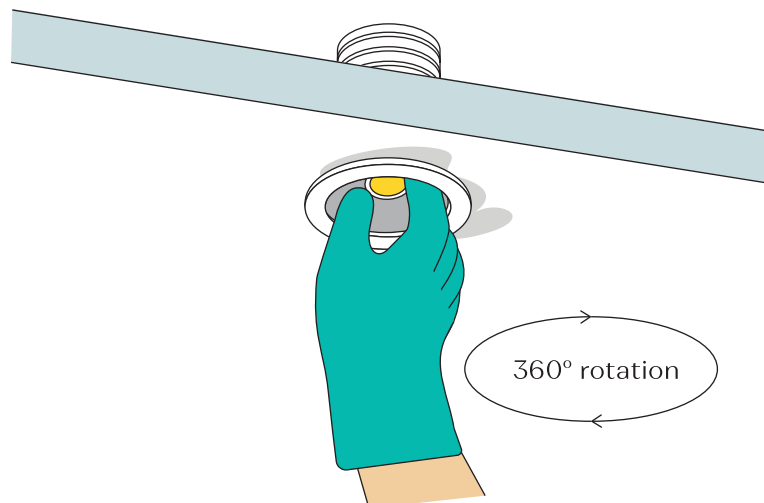

ROTATING

If your module is tilted, rotate to point to your desired lighting direction.
Rotate the inner part of the downlight as highlighted in yellow